


MK101XHML

Touchmonitor L-Line

We trust on **projective capacitive touchscreen technology**. This reliable touch display solution provides quick response times and accurate data input.

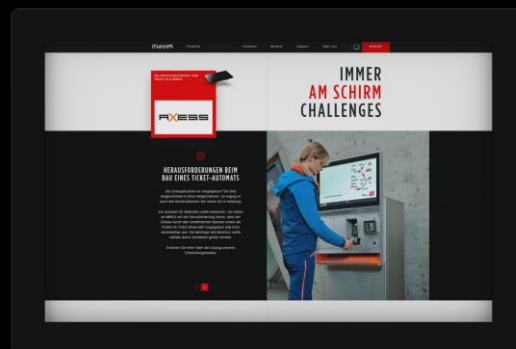

Touchmonitor



DISPLAY FEATURES

Typ:	10.1" Desktop or Open Frame, Multitouch, High Bright, Optical bonded
Resolution:	1280 x 800 (WXGA) 16:10
Pixel Pitch:	0.0565 (H) x 0.1695 (V) mm
Diagonal/ Active Area:	25,7 cm / (W x H): 216.96 x 135.60 mm
Colour Performance:	16.7 Mio
Viewing Angle:	H, V (CR ≥ 10): 160° / 160°
Contrast (static):	1000:1
Brightness:	1000 cd/m2
Response Time:	14 ms
Operating Power:	12V DC (optional 24V) / external AC power supply
Power Consumption:	< 12 W
Operating temp./ hum.:	-20 ~ +70 °C ; 20 ~ 90% humidity
Storing temp./ hum.:	-30 ~ +80 °C ; 10 ~ 90% humidity
Dimensions / weight:	249.1 x 167.7 x 33 mm; 1.0 kg

INTERFACE

Connectivity:	VGA / DVI / HDMI / DP / Audio out / USB
----------------------	---

FEATURES

Operating control:	On/off switch, 4 button OSD, auto button
Functions:	Contrast, brightness, vertical and horizontal image position, phase, pixel clock, 1 user, 2 pre-installed colour temperatures, colour weighting, OSD, input source
Touch Panel:	PCAP Projected Capacitive
Controller:	EETI 10 Finger Multitouch USB (HID device)

IMMER **AM SCHIRM**,
MONITORE DIE
PASSEN.

Nehmen Sie einfach Kontakt auf!
Tel. +43 7229 23023
eMail info@mikka.com
Web www.mikka.com

MIKKA GmbH
Traunfurterstrasse 110
4052 Ansfelden
Austria