


MK156XHAGO

Touchmonitor O-Line

We use **projective capacitive touch solutions** (PCAP). The reliable technology offers fast response times and precise gesture recognition (e.g., swiping or zooming)

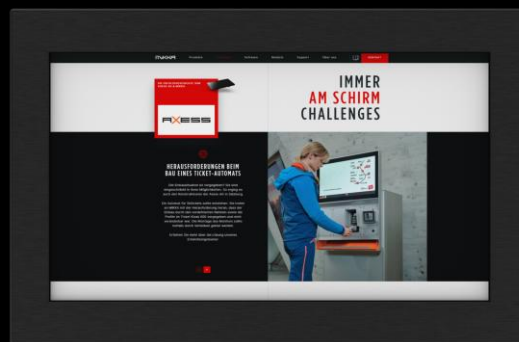

Touchscreen



DISPLAY FEATURES

Panel Type:	15.6" Glas, High Bright, Anti Glare, Outdoor
Resolution:	1920 x 1080 (FullHD) 16:9
Pixel Pitch:	0.17925 (H) x 0.17925 (V) mm
Diagonal/ Picture size:	39,5 cm / (B x H): 344,16 x 193,59 mm
Colour Performance:	16.7 Mio
Viewing Angle:	H, V (CR ≥ 10): 176° / 176°
Contrast (static):	750:1
Brightness:	1500 cd/m2
Response Time:	15 ms
Operating Voltage:	12V DC (optional 24V) / external power supply
Power Consumption:	< 38 W
Operating temp./humidity:	-40~ +80 °C ; 20 ~ 90% humidity
Storage temp./humidity:	-40~ +80 °C ; 20 ~ 90% humidity
Dimensions and Weight:	407,06 x 263,55 x 40 mm; 2.85 kg

INTERFACE

Connectivity:	VGA / DVI / HDMI / DP / Audio out / USB
---------------	---

FEATURES

Operating control:	On/off switch, 4 button OSD, auto button
Functions:	Contrast, Brightness, vertical and horizontal image position, phase, pixel clock, 1 user, 2 pre-installed colour temperatures, colour weighting, OSD, input source
Cover Glass:	IK07

IMMER AM
SCHIRM,
MONITORE DIE

Nehmen Sie einfach Kontakt auf!
Tel. +43 7229 23023
eMail info@mikka.com
Web www.mikka.com

MIKKA GmbH
Traunfurterstrasse 110
4052 Ansfelden
Austria