

Digital Signage - Sparkle Series



10.1" LCD-based Double-sided Screen ESL

ZKS101D-A

PRODUCT DATASHEET

PRODUCT FEATURES



Colorful screen, extraordinary design

- LCD Full-color Screen (no acrylic panel)
- 15mm ultra-thin thickness, 7.17mm ultra-narrow border
- High resolution supports highly clear display



Refresh quickly & Support varied advertising strategies

- Display words, pictures, videos, website pages and other formats
- Support free combination playback of a variety of file formats
- 0.1s ultra-fast update, satisfying varied advertising strategies
- Super-rich templates library which can be infinitely expanded



Easily fit in various environments with high protection level

- Normal operation between -20-50°C
- IP5X rated water and dust resistant
- Super durable and highly protected against falls and impact.



Cloud management with high extensibility

- Pioneering ZKONG SaaS platform supports efficient collaboration of different devices across stores.
- pre-set system, plug and play.
- Support remote adjustment of display content, screen brightness, etc.
- NFC, Wi-Fi



Safe & stable wired power supply

- Wired DC power
- Safe and durable customized power supply rail
- 40,000+h service life, green and eco-friendly




Free customization with rich accessories

- Hook, ring, holder and other various accessories.
- Adapt to a variety of shelves types and multi-scene application
- ZKONG own manufacturing base provides high quality products while minimizing costs.

TECH SPECIFICATION

EXAMPLARY PICTURE

TECHNICAL DRAWINGS (mm)

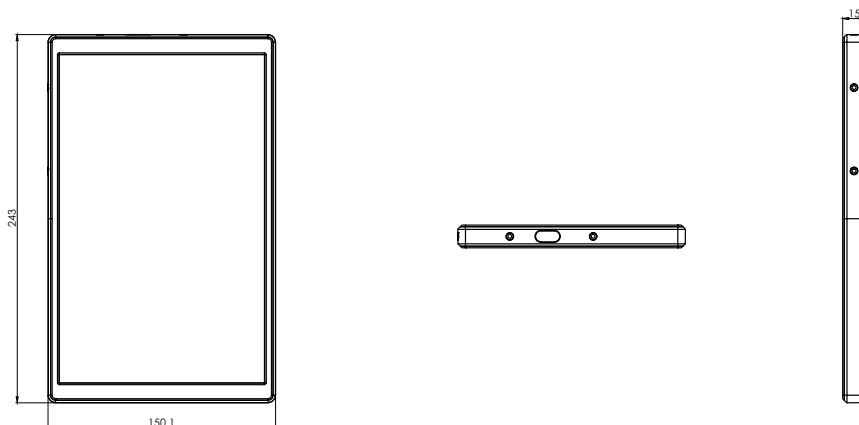

Display Features

Display Technology	TFT
Active Display Area(mm)	135.36 (W) X 216.576 (H) mm(*2)
Resolution (Pixels)	800X1280
Pixel Colors	Full color
Viewing Angle	12 o'clock
Backlight	White high LED backlight
Brightness	280cd/m2
Usable Pages	6

Wireless

Operating Frequency	2.4-2.485GHz
Encryption	128-bit AES
OTA	YES

Physical Features

Powered by	DC powered
NFC	YES
Operating Temperature	-20-50°C
Waterproof Grade	IP5X
Humidity	10%~80% RH(No condensation)
Dimensions	243*150.1*15mm
Packaging Unit	20 Labels/box

Compliance

Certification	CE,ROHS,FCC,MIC
----------------------	-----------------