DATASHEET

MK238XAMS

Touch Display S-Line

We trust in capacitive touch technologies (PCAP). Depending on your requirements, the display comes fitted with additional features like touch through glass or mirror displays

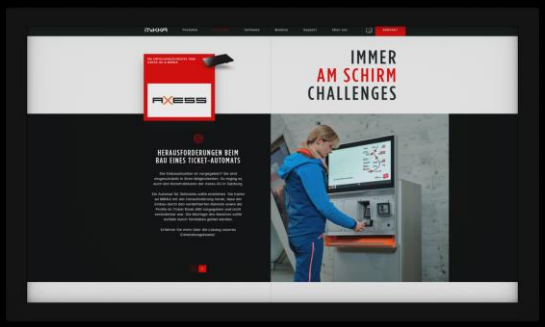

Touchscreen

DISPLAY FEATURES

Panel Type:	23.8“ Multitouch, Anti-Glare
Resolution (max.):	1920 x 1080 (FullHD) 16:9
Pixel Pitch:	0.2745 mm
Diagonal/ Picture size:	60,4 cm / (W x H): 527.0 x 296.5 mm
Colour Performance:	16.7 Mio
Viewing Angle:	H, V (CR ≥ 10): 178° / 178°
Contrast (static):	1000:1
Brightness:	250 cd/m2
Response Time:	14 ms
Operating Voltage:	12V DC (24V DC optional) / external power supply
Power Consumption:	<24 W
Operating temp./hum.:	±0 ~ +50 °C ; 20 ~ 90% humidity
Storage temp./hum.:	-20 ~ +60 °C ; 10 ~ 90% humidity
Dimensions and Weight:	559.2 x 334.5 x 48.5 mm (W x H x D); 5.1 kg

INTERFACE

Connectivity:	VGA / DVI / HDMI / DP / Audio out / USB

FEATURES

Operating control:	On/off switch, 4 button OSD, auto button
Functions:	Contrast, Brightness, vertical and horizontal image position, phase, pixel clock, 1 user, 2 pre-installed colour temperatures, colour weighting, OSD, input source
Touch:	PCAP Projected Capacitive Thickness: 2,7mm, Hardness: 6H
Controller:	EETI 10-point Multitouch USB

IMMER AM SCHIRM,
MONITORE DIE PASSEN.

Tel. +43 7229 23023
Fax +43 7229 230231
eMail info@mikka.com
Web www.mikka.com

MIKKA GmbH
Traunuferstrasse 110
4052 Ansfelden
Austria