


## 21.5" Open Frame

# DuraBrite Series Outdoor High-Bright Touchmonitor



Operating outdoor kiosks is not for the fainthearted. The average touch display just won't do because of the numerous 'moving parts' in an outdoor environment. You would need both brains and brawn for successful deployment. To take on these physical challenges, General Touch has come up with the DuraBrite series outdoor high-brightness touchmonitors. Currently available in sizes from 7 to 32 inches, the state-of-the-art DuraBrite series have been carefully designed and produced with innovative enhancements and capabilities. These enhancements would facilitate optimal performance in adverse environmental conditions, making the series ideal for use in payment terminals, self-service kiosks, EV charging stations, ticketing machines, vending machines, outdoor signage and more.



EV Charging Station



Self-service Kiosk




Vending Machine



Ticketing Machines



Parking Pay Station



Outdoor Signage

### Features & Benefits

- High-Tni up to 105° allows a wide operating temperature range from -20°C to 60°C, eradicating any fear of display black-out.
- Brightness up to 1500 nits and anti-glare coating delivers better visuals and readability even in direct sunlight.
- 50K hours LED lifetime - 50,000 hours of MTBF for lasting 24/7 operation.
- UV&IR protection minimizes internal heat accumulation and decelerates components aging significantly.
- UV-resistant ink prevents the screen printing from peeling effectively.
- The touch performance is heightened to facilitate smooth operations even when there are water droplets on the touch glass.
- Advanced optical bonding takes interior fogging out of the equation.
- The iThermal system achieves dynamic heat dissipation and optimal cooling effect through intelligent thermal management.
- Automatic brightness adjustment corresponds with ambient light to ensure 24/7 stable performance and to extend LCD panel lifespan.
- The metal parts have been beefed up with rustproofing for all-year outdoor deployment.
- When the touchmonitor is properly fitted to the kiosk without any gaps, the waterproof and dustproof rating can reach IP65 & Nema 4x, further fortifying the whole touch unit.

**SPECIFICATIONS**

Name	21.5 Inch Open Frame Touch Monitor (Optical Bonding)
Model	OSL223-RC80A0-UDA2L0-3.0
<b>LCD Panel Parameters</b>	
Display Technology	Active Matrix TFT-LCD With LED Backlight
Aspect Ratio	16:9
Active Area (W x H)	476.64 × 268.11mm
Native Resolution	1920 × 1080@60Hz
Response Time (Typ.)	14ms
TNI	105°C
Display Colors	16.7million
Luminance (Typ.)	1500nits, with P-Cap 1050nits(touch monitor), High TNI: 105°C
Contrast Ratio (Typ.)	400:1
LED Backlight Time(Typ.)	50,000 hours
Viewing Angle (Typ.)	Horizontal (left/right) CR≥10 89° /89°
	Vertical (up/down) CR≥10 89° /89°
<b>Touch Screen Parameters</b>	
Touch Technology	Projected Capacitive (P-Cap)
Cover Glass Treatment	Strengthened
Cover Glass Surface Treatment	Anti-Glare
Impact resistance Level	IK10, higher than UL60950 ball-drop standard
Ink	UV-resistant
Active Area(W x H)	478.0 × 269.6 ± 0.3mm
Thickness(Total)	7.5 ± 0.3mm
Light Transmission	≥70%
Response Time	10ms
Touch Screen Interface	USB
Touch Point	10
Feature	UV&IR Filter
<b>Overall Parameters</b>	
Case/Bezel Color	Gray
Mounting Options	VESA: 100 × 100 mm, Side mounting
Outline Dimensions	536.0mm × 322.7mm × 73.4mm
Power Supply	24V DC, See the drawing

Light sensor	Yes
On Screen Display (OSD)	Power, Auto, Up, Down, Menu
Power Consumption	MAX: 98W
Sealability	Sealable to IP65 when integrated into a cabinet
Bonding Type	Optical bonding
Operating Altitude	≤3000m
Heat Dissipation Solution	Intelligent thermal management built-in
Operating Time	7*24hrs with dynamic video
Temperature Range & Humidity (Non Condensing)	Operating: -20°C to +60°C, Humidity: 20% to 80%; Storage: -20°C to +70°C, Humidity: 10% to 90%;
I/O	VGA, DVI, HDMI, DP, USB (Type B, for touch)
Accessories	Cables: VGA × 1, USB × 1, 1.5m Length
Carton Box Dimensions	656mm (L) × 222mm (W) × 454mm (H)
Weight	Net: 10.66kg, Gross: 14.78kg
MTBF	50,000 hours demonstrated
Agency Approvals	CE,FCC,UKCA
Warranty	1 year

Note: The light leakage (mura) standard of the edge area surrounding active area is invisible under 1% ND filter.




Ordering Information		
Model	Part Number	Description
OSL223-RC80A0-UDA2L0-3.0	10202010944R	21.5", Open frame, 16:9, 1500nits, PCAP, USB, VGA & DVI HDMI & DP, Sunlight readable, Outdoor, Gray

Contact sales for other options



Optional Accessories		
Model	Part Number	Description
	30301010018R	UK
Power Cable	30301010011R	EU 1500mm
	30301010010R	US
HDMI Cable	30302030001R	1500mm
DP Cable	30302010001R	1500mm
Adapter	30207010024R	24V/6.25A, DC Cable: 1200mm

# Drawing

TITLE: OSL223-RC80A0-UDA2L0-3.0		
MARK:	AMEND	SIGNATURE
Δ		

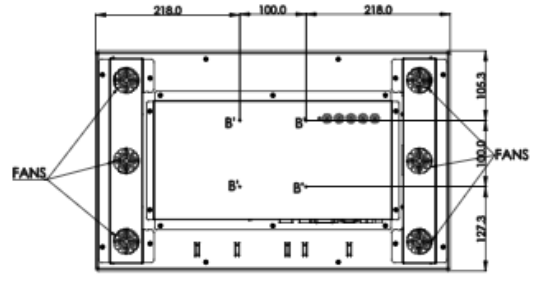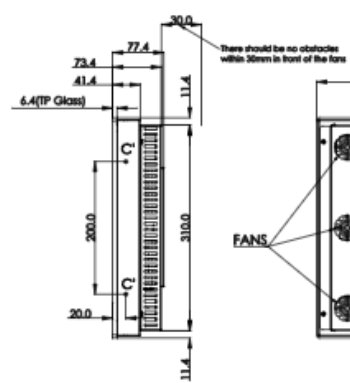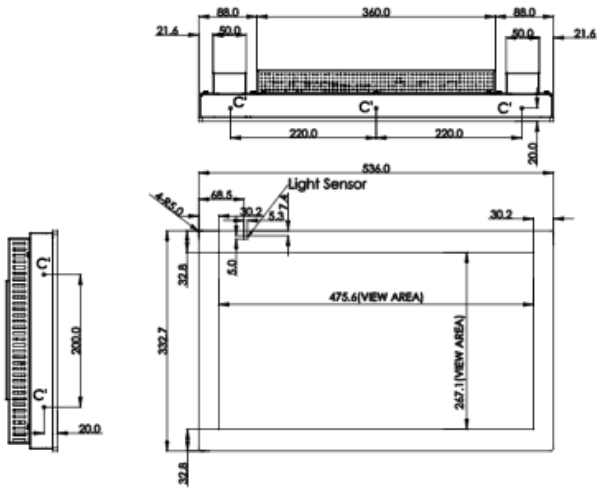

"B": M4 Threads, X4 Max Screw Depth=6mm  
 "C": M4 Threads, X10 Max Screw Depth=10mm

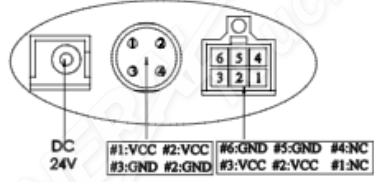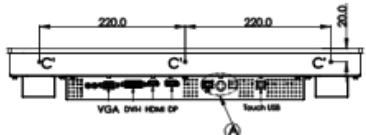

Detail A  
10:1

DO NOT SCALE DRAWING

SPECIFICATION		OVERALL DIMENSIONS		ESD@32.7/27.4		ANTI-GLARE		Y		N		DESIGNER:	
UNIT	DATE	VIEW AREA		475.6x267.1								Drew Saha	
MM	2025/02/27	GLASS THICKNESS		6.0 MM								CHECKED BY:	
PROJECTION:		SILK SCREEN COLOR		BLACK		MOUNTING		VESA		BRACKET		Drew Saha	
SHEET 1 of 1		NOTES										APPROVED BY:	
VER: 0.1	SCALE: 1:1	TOUCH TECHNOLOGY		P-CAP		NON-TOUCH		SAW		RESISTIVE		Drew Saha	
TOLERANCE: ±1.0MM													

Go to [www.generaltouch.com](http://www.generaltouch.com) for more products and information, or contact us.  
 General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120  
 Fax: 0086-28-85124115  
 E-mail: [info@generaltouch.com](mailto:info@generaltouch.com)  
<http://www.generaltouch.com>